

# Centaur

Floor Systems

# PlayFALL

Don't Play on Anything Less.

## PlayFALL Features:

- Resilient
- Complies with ASTM F1292 Tests
- Non-Toxic
- Exceeds ADA Requirements
- Slip Resistant
- Porous for Drainage
- Easy to Install
- Low Maintenance
- Interlocking Pins



PlayFALL rubber safety tiles provide the optimum fall safety for kids play environments. Install a PlayFALL surface and eliminate the need to fill in the holes, remove animal wastes and potentially dangerous hidden objects.

When kids play, they also fall, and that's where PlayFALL comes to the rescue. PlayFALL is designed to meet the stringent ASTM requirements for playground fall safety and is available in a variety of thicknesses to match the fall heights of most play equipment and events.

Created from recycled rubber, diverting tonnes of waste from landfills, PlayFALL Safety Tiles are durable, resilient and porous to allow free drainage, and available in two standard finishes... our "Basic Series" of Black or Pigment Colors, and our "EPDM Series" of custom color EPDM granules.




play  
FALL

# PlayFALL Specifications

Size	Thickness	Fall Height		Weight
Tiles:		"Basic"	"EPDM"	
24" x 24"	1.75" (45mm)	4'	3'	19.6 lbs.
(12" x 12" grid pattern)	2.50" (65mm)	6'	5'	22.6 lbs.
top finish)	3.00" (75mm)	8'	6'	25.0 lbs.
	3.25" (85mm)	10'	8'	30.0 lbs.
Edge Ramps				
40" x 8"	1.75" (45mm)	N/A	N/A	11.5 lbs.
40" x 9"	2.50" (65mm)	N/A	N/A	18.0 lbs.
40" x 10"	3.00" (75mm)	N/A	N/A	22.8 lbs.
40" x 10"	3.25" (85mm)	N/A	N/A	23.8 lbs.

play  
FALL

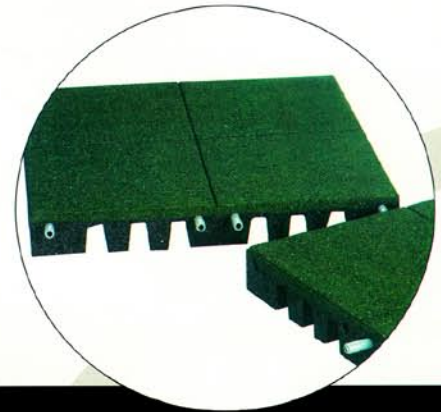

## PlayFALL Colors

"Basic Series" (SBR & Pigment)	"EPDM Series" 25%, 50%, and 100% available		
Black	Terra Cotta	Green	Purple
Terra Cotta	Brown	Signal Green	Blue
Green	Yellow	Grey	Capri Blue
	Lemon Yellow	Blue Grey	

## PlayFALL Installation

PlayFALL Safety Tiles are connected using an Interlocking Pin system in conjunction with a caulking type of adhesive. As per the diagram, PlayFALL is designed to be placed in an "offset Brick" grid pattern with alternating rows beginning with a half tile. PlayFALL's Interlocking System allows for the tiles to be installed equally well over either a hard surface sub-base such as concrete, or a well compacted granular surface. This easy installation method ensures a safe and secure play surface, while reducing preparation costs and minimizing maintenance visits.

## PlayFALL Accessories

Adhesives:



PL Premium	Edge to edge adhesive tubes	
	825 ml	(1 tube per 14 tiles)
	300 ml	(1 tube per 5 tiles)
Caulking Gun	Economy for 825 ml tubes	
Mapei G19	Base to tile adhesive (2 part epoxy)	
	1US Gallon per 120 sq. ft.	
Landscape Fabric	Fabric (36")	Linear Foot

**Centaur**  
Floor Systems

135 Chapala Street  
Santa Barbara, CA 93101  
(800) 536-9007 • (805) 957-0182  
Fax (805) 957-0125

[www.centaurfloors.com](http://www.centaurfloors.com)

### PlayFALL Loose Fill Crumb Rubber

Loose Crumb Rubber made from 100% Recycled Rubber providing a safe, resilient, non-abrasive surface for your play areas. Meets ASTM standard (1292-93) for 10' fall height @ 6" depth. Easily installed and maintained over existing surfaces. Sold in bulk bags, 50 - 1000 lb. 1 sq. ft. @ 6" deep = 14 lbs.

### PlayFALL Wear Pads

Eliminates ditches at the end of slides or under swings. A 1.75" tile and a .75" mat provides a 48" critical fall height. Also available in 4' x 4' x 1.50" solid wear pads.

Distributed By:

