


FasTrack



SPORTS FLOORING

The new GREEN sports floor

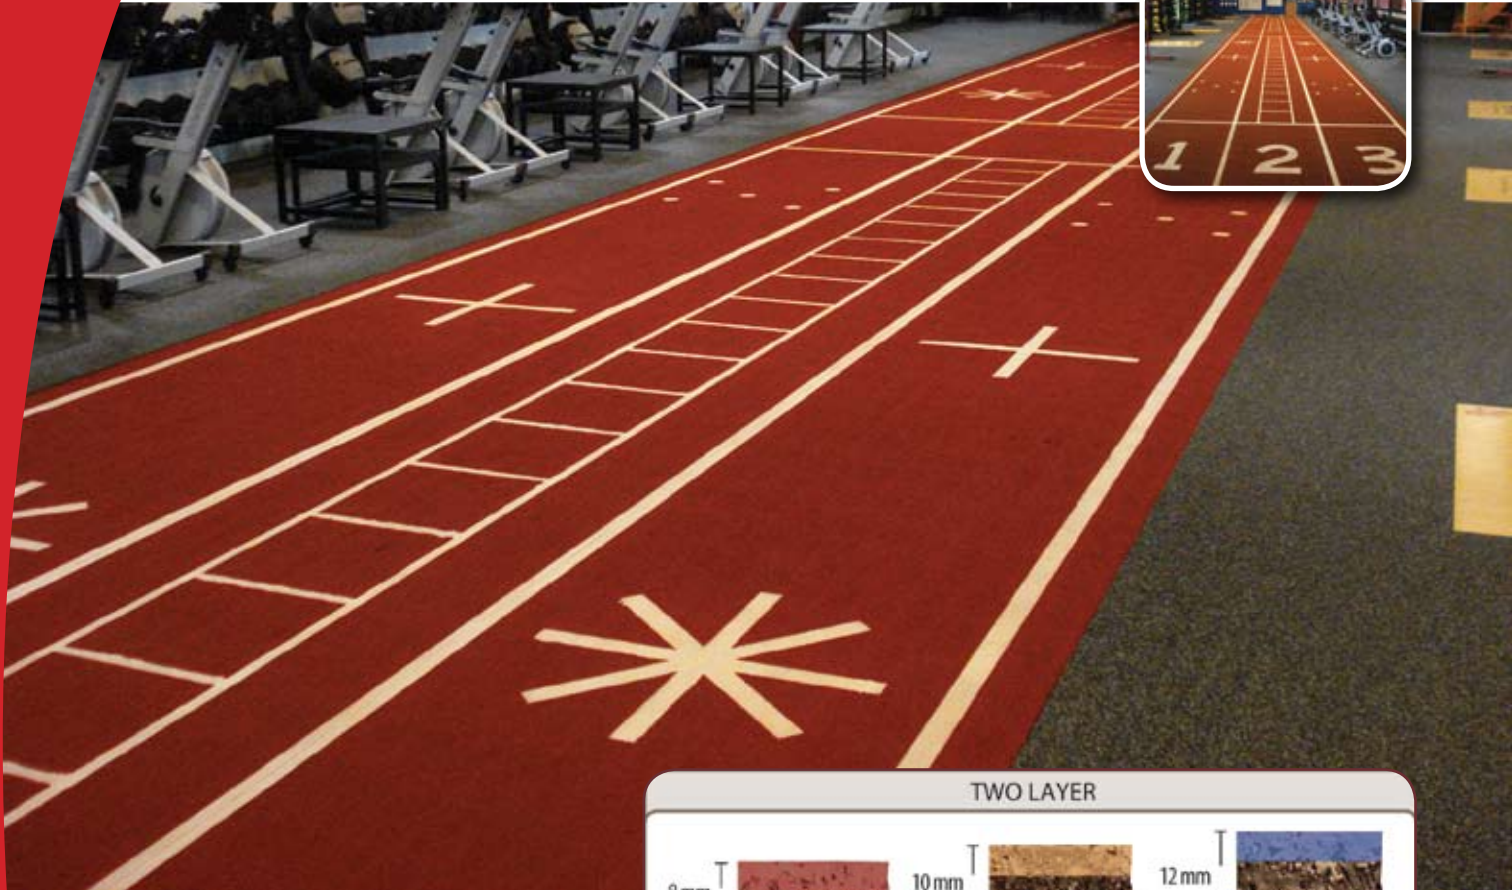

Applications

- Professional Sporting Facilities • YMCAs • Recreational Center • Health Clubs
- School Facilities • High Schools / Colleges / Universities

An Environmentally Friendly Running Track

Brighten up your fitness facility with brilliant colors from the FasTrack collection. FasTrack is ideal for gymnasium surfaces, aerobic centers, tennis courts, indoor jogging tracks, weight rooms, and cardio areas. FasTrack delivers energy and exuberance to any fitness application.

FasTrack is manufactured by laminating 4mm colored rubber with recycled sports underlayment. Available in three standard thicknesses (8mm, 10mm, and 12mm). Select from the 6 standard colors or ask about the expanded color selection available by special order. Whatever the application, the hues from the FasTrack collection guarantee stunning design and energetic color saturation.

Centaur
Floor Systems

- 135 Chapala Street • Santa Barbara, CA 93101
- Toll Free: 800-536-9007 • Phone: 805-957-0182 • Fax: 805-957-0125 • www.centaurfloors.com



Material Properties:

Performance of the prefabricated rubber athletic flooring to conform to the following criteria:

FasTrack Criteria	Test Method	Result
Tensile Strength	ASTM D 412	> 200
Flexibility 1/4" mandrel	ASTM F 137	Pass
Thermal Conductivity	ASTM C 518	> 0.4
Static Load Limit	ASTM F 970	< 0.02
Fungal Resistance Test	ASTM G 21-90	No growth
Coefficient of Friction	ASTM D 2047	> 0.9
V.O.C. Compliant	ASTM D 5116	Yes
Color Stability		Good
Light reflection		Good
Chemical Resistance		Good
Standard Vertical Deformation	DIN 18032-2	0.7 mm
Deformation Trough W100	DIN 18032-2	0.0 mm
Rolling Load Limit	DIN 18032-2	1000 N
Ball Rebound	DIN 18032-2	99 %
Impact Resistance	DIN 18032-2	15 Nm
Remaining Indentation	DIN 18032-2	0.12 mm
Sheet Dimension	Manufacturer	4' width by 50' length
Standard Tolerance Width	Manufacturer	+ 3/4" - 0"
Standard Tolerance Length	Manufacturer	+ 1% - 0"
Standard Tolerance Thickness	Manufacturer	+ .6 mm
Standard Sheet Weight	Manufacturer	1.72 lbs/sf
Ball Rebound	EN 12235	Pass
Force Reduction	ASTM F2569 / EN 14808	Class 1

*this is 8mm, see 10mm, and 12mm specs at centaurfloors.com

Manufacturer Warranty:

The rubber athletic flooring is warranted to be free from manufacturing defects for a period of three (3) years from the date of shipment from the Manufacturer.

The rubber athletic flooring is warranted against excessive wear under normal usage for a period of five (5) years from the date of installation.


Maintenance & Cleaning:

Use Taski Profi Cleaner and Vision Matte Sealer. Visit our cleaning & care website at www.centaurmaintenancesupplies.com for more information.

Standard Colors:



1703 - Sunshine




2160 - Burnt Orange



2150 - Bronze



1810 - Red



1615 - Camouflage



1409 - Blue

8 mm, 10 mm & 12 mm Applications

- Multi-purpose standard: ideal for jogging tracks, basketball, tennis, and other sports
- Excellent force reduction and ball rebound
- Made with ColorMill™ EPDM, the highest quality EPDMs available
- 4mm solid color saturation allows for reduced wear visibility vs. polyurethane paint durability
- Logos can be custom ordered
- Can contribute toward earning LEED points; for more information visit www.centaurfloors.com
- Lower density underlayment offers high force-reduction

135 Chapala Street
Santa Barbara, CA 93101

For information on cleaning visit:
www.centaurmaintenancesupplies.com



MADE IN THE USA

Centaur

Floor Systems

Toll Free: 800-536-9007

Phone: 805-957-0182

Fax: 805-957-0125

www.centaurfloors.com